


LED Tree Light


ALSL1135T

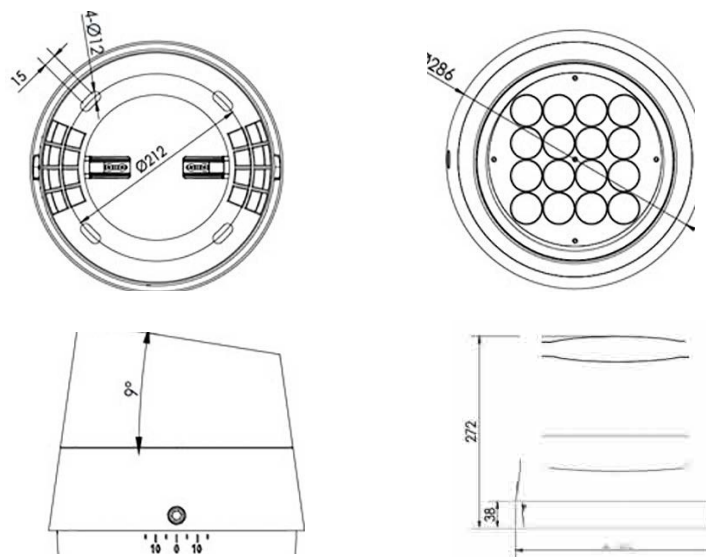

- 1, Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2, With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3, Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4, Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5, Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

Product Code	ALSL1135TE-16	ALSL1135TD-16	ALSL1135TF-16	ALSL1135TC-48
LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 IN 1	CREE XP-E2
LED Quantity	16 pcs	16 pcs	16 pcs	48 pcs
Rated Power	75W	60W	100W	100W
Input Voltage	AC100-305V	AC100-305V	DC36V / AC100-3-05V	DC36V/AC100-305V
Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Colour	Single	Single	RGBW	RGB
Beam Angle	2.6° 3.5° 12° 20° 30° 60° 10X70° 5X20°	2.6° 3.5° 12° 20° 30° 60° 10X70° 5X20°	15° 20° 30° 15X60°	5° 8° 12.5° 30° 15X60°
Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM
Life	50000H	50000H	50000H	50000H
IP Rating	IP66	IP66	IP66	IP66
Ambient Temperature	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C
Ambient Humidity	10% ~90%	10% ~90%	10% ~90%	10% ~90%



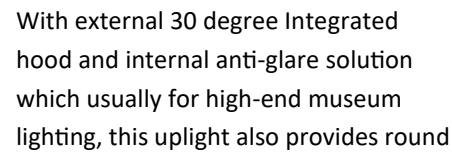

High pressure die casting aluminum light body with more than 2.5mm thickness; Patented internal and external combined heat dissipation design;
Imported silicone sealing ring ensures resistance to high/low temperature and aging; Double layer fluorocar-

